



## RAPID MAX HIGH SPEED DOOR



### FEATURE & BENEFITS:

- ✓ Exterior and internal door with stainless steel up rights and motor cover
- ✓ Maximum dimensions width 12000 m height 12000 m
- ✓ Adjustable opening speed range 0.8-1.5 m/s
- ✓ Adjustable closing speed range 0.5-1.5 m/s
- ✓ Air bag sensor in the bottom of the door
- ✓ Photo safety beams
- ✓ Wind Resistance 9m/s-50pa based on 3\*3 m
- ✓ Heavy duty, highly efficient, low-noise Servo motor
- ✓ Servo motor and controls
- ✓ High Density Fabric 5700/5100n/5cm
- ✓ Fabric tear strength 900/80n
- ✓ Clear vision window



Life Time Warranty  
On Workmanship



24 Months on Equipment  
Supplied and installed



## APPLICATION

- ✓ Exterior door
- ✓ Interior door

## DIMENSION

- ✓ **Width:** (12000)mm Max
- ✓ **Height:** (12000)mm

## MAX SPEED

- ✓ **Opening speed:** 0.8m-1.5m/s adjustable
- ✓ **Closing speed:** 0.5m-1.2m/s adjustable


## SAFETY FEATURES

- ✓ Bottom safety Edge airbag bump strip
- ✓ Safety reflective Photo beam
- ✓ Multibeam high-performance light curtains (optional)
- ✓ Microwave motion detector (optional)
- ✓ Traffic lights 100mm red green light (optional)

## SEAL PERFORMANCE

- ✓ Seal cloth in the bottom of the door suit for rough floor
- ✓ Seal wool top in each side of the doorpost
- ✓ Better performance in seal, wind-proof, sound-proof and bug-proof

## DIMENSIONS

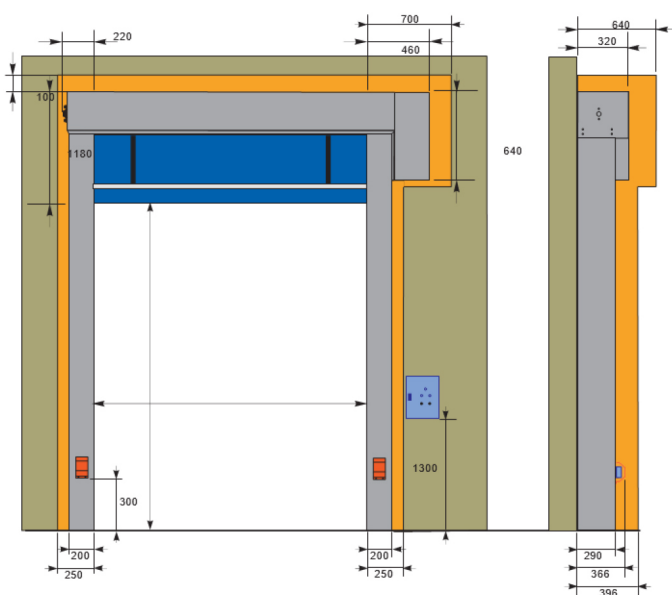

## WIND RESISTANCE

- ✓ Wind resistance 9m/s-50pa,
- ✓ Based on size 3\*3 M

## ELECTRICAL /MOTOR

- ✓ 220 -240v /50hz
- ✓ Heavy Duty Highly Efficient Servo motor
- ✓ Servo Control system, electromagnetic brake, absolute encoder limits, automatic torque control

## FRAMEWORK

- ✓ Stainless Steel

## DOOR PANEL

- ✓ High density of industrial base fabric with tensile strength of 5700/5100N/5cm, Tearing strength of 900/80N, suit for temperature of -30°C- 70°C ,fire rating fits for German MZDINBL standard
- ✓ PVC Clear vision window

## DOOR CONTROLS

- ✓ Internal push button controls
- ✓ External push button controls
- ✓ Microwave motion detector with built-in crosswalk detection (optional)
- ✓ Radar Sensor
- ✓ Inground Induction loop (optional)
- ✓ Radio remote control (optional)
- ✓ Proxy card Access control (optional)

## Fabric Colour options

