




RAPID SECURE HIGH-SPEED DOORS

Rapid Secure High-Speed Doors are the ideal solution for maintaining top-level security while ensuring fast and efficient access. Constructed with lightweight foam-filled slats, these doors achieve an impressive average opening speed of 2 meters per second. Engineered to withstand winds of up to 120 km/h, they combine superior insulation with a lightweight design, offering exceptional strength and impact resistance. With Grade 12 wind resistance and advanced anti-theft features, these high-speed doors are perfect for both indoor and outdoor applications.

Built to meet the demands of high-traffic environments, the High-Speed Aluminium Spiral Door from Rapid Automatic Access is designed for durability and performance. The transparent slats provide excellent visibility, enhancing safety during vehicle entry and exit, while ensuring smooth and reliable operation in even the most challenging conditions.

RAPID, SECURE ROLL UP

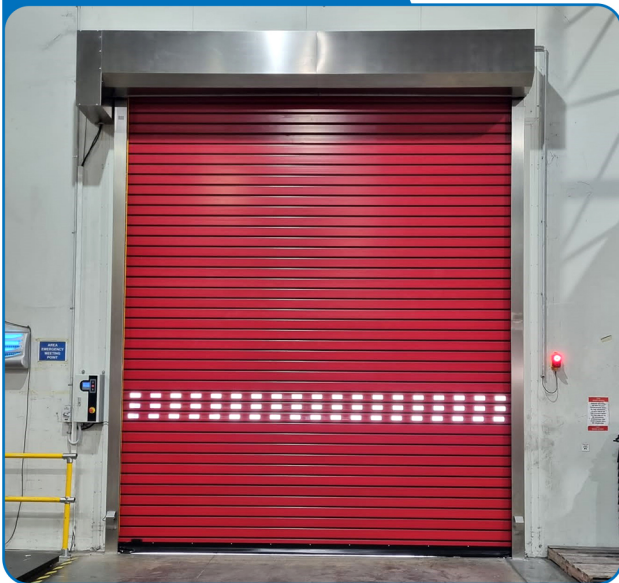

The Rapid Secure High-Speed Roll-Up Door offers a compact, space-saving design that uses lightweight aluminum foam-filled slats, which roll up neatly onto themselves. This makes it an ideal solution for budget-conscious applications while maintaining excellent security and efficiency. Even in its roll-up configuration, the door provides high durability, strength, and reliable performance, making it perfect for environments requiring both space optimization and dependability. The Rapid Secure Roll-Up Door is designed to accommodate openings of up to 4.5 meters in width and 6 meters in height, delivering a practical and efficient solution for various industrial and commercial settings.

RAPID, SECURE SPIRAL DOOR



The Rapid Secure Spiral Door is a premium product specifically designed and engineered for high-frequency usage. Constructed with lightweight aluminum slats, the door spirals smoothly into a unique guide system, eliminating the friction and noise typically associated with traditional roll-up doors. This innovative design ensures exceptionally fast, smooth, and robust operation, making it ideal for demanding environments. With a maximum opening size of 8 meters in height and 8 meters in width, the Rapid Secure Spiral Door is perfect for accommodating large openings while delivering unmatched efficiency, durability and performance.



Life Time Warranty
On Workmanship



24 Months on Equipment
Supplied and installed



APPLICATION

- ✓ Internal Door
- ✓ External Door

DIMENSION

Rapid secure Roll up

- ✓ Width: (4500)mm Max
- ✓ Height: (6000)mm Max

Rapid secure Spiral door

- ✓ Width: (8000)mm Max
- ✓ Height: (8000)mm Max

FRAMEWORK

- ✓ 304 Stainless Steel guide rails

SAFETY FEATURES

- ✓ Bottom Edge Air bag bump strip
- ✓ Reflective Photo Beam
- ✓ Multibeam high performance Light Curtain (optional)
- ✓ Microwave Motion detector (optional)
- ✓ LED Red /Green Traffic Lights (optional)

WIND LOAD RESISTANCE

- ✓ 120 km/h (kilometers per hour)
- ✓ Beaufort scale rating: 12
- ✓ Wind speed: 35 m/s (meters per second)

ELECTRICAL /MOTOR

- ✓ 220 - 240 V Ac / 50Hz
- ✓ 0.75-1.5 Kw Servo Motor
- ✓ IP54 Protection

DOOR PANEL


- ✓ Extruded Aluminum slat filled with insulation foam
- ✓ Clear vision panel or clear panels

DOOR CONTROLS


- ✓ Internal push button controls IP54
- ✓ External push button controls IP54
- ✓ Microwave motion detector with built in crosswalk detection (optional)
- ✓ Radar Sensor (optional)
- ✓ Inground Induction loop (optional)
- ✓ Radio Push button remote (optional)
- ✓ Proxy Card Access Control (optional)

PRODUCT STRUCTURE

Rapid Secure roll up

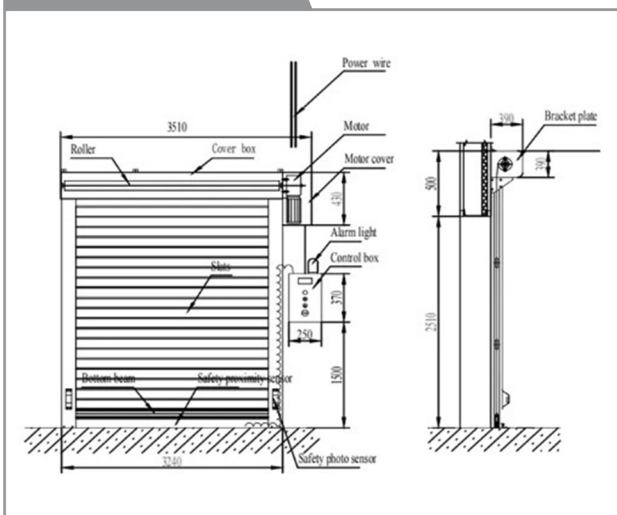

Rapid secure Spiral door

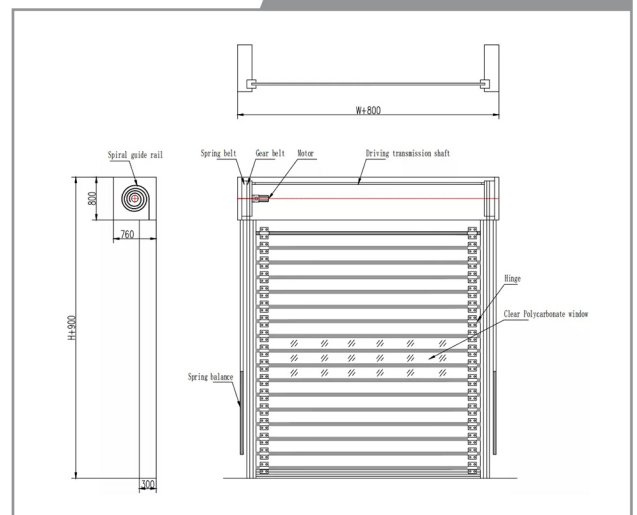

Panel Color options

