



RAPID SWIFT HIGH-SPEED DOOR



The Rapid Swift High-Speed Door is designed to revolutionize the way factories and warehouses manage their environments. Combining speed, reliability, and sleek design, this door is the perfect solution for businesses that demand efficiency and precision while maintaining your desired Environment with its super-fast operation, the Rapid Swift ensures smooth and seamless transitions, reducing downtime in high-traffic areas. Whether you're managing temperature-sensitive goods or minimizing contamination risks, this door helps maintain a controlled environment with ease.

Crafted with durable stainless steel and polymer materials, its slimline design not only saves space but also adds a modern, professional touch to any facility. Advanced safety features, such as hidden infrared barriers and a safety contact edge, prioritize the protection of your team and equipment, making it a safe and reliable choice.

FEATURE & BENEFITS:

- ✓ Stainless Steel Guide rails and door header cover
- ✓ Maximum W 5000mm x H 6000mm
- ✓ Adjustable open speed 1-2m/s- 2m/s
- ✓ Adjustable closing speed 0.5m/s -1.5m/s
- ✓ Photo Safety Beams



Life Time Warranty
On Workmanship



24 Months on Equipment
Supplied and installed

APPLICATION

- ☑ Internal Door
- ☑ External Door

DIMENSION

- ☑ Width: (5000)mm Max
- ☑ Height: (6000)mm Max

FRAMEWORK

- ☑ 304 Stainless Steel guide rails

SAFETY FEATURES

- ☑ Bottom Edge Air bag bump strip
- ☑ Reflective Photo Beam
- ☑ Multibeam high performance Light Curtain (optional)
- ☑ Microwave Motion detector (optional)
- ☑ LED Red /Green Traffic Lights (optional)

SEAL PERFORMANCE

- ☑ With stand pressure ranging from 0 to 50 PA internal or external.
- ☑ Bottom Soft edge to seal against the floor.

ELECTRICAL /MOTOR

- ☑ 220 - 240 V Ac / 50Hz
- ☑ 0.75-1.5 Kw Servo Motor
- ☑ IP54 Protection
- ☑ Uninterruptible Power Supply (optional)


DOOR PANEL

- ☑ High Density of Industrial base fabric with tensile strength of 5700/5100N/5cm tearing strength of 800/80N
- ☑ 2 mm Thick Fabric with clear window
- ☑ Self-repairing zipper mechanism (optional)

DOOR CONTROLS

- ☑ Internal push button controls IP54
- ☑ External push button controls IP54
- ☑ Microwave motion detector with built in crosswalk detection (optional)
- ☑ Radar Sensor (optional)
- ☑ Inground Induction loop (optional)
- ☑ Radio Push button remote (optional)
- ☑ Proxy Card Access Control (optional)

DIMENSIONS

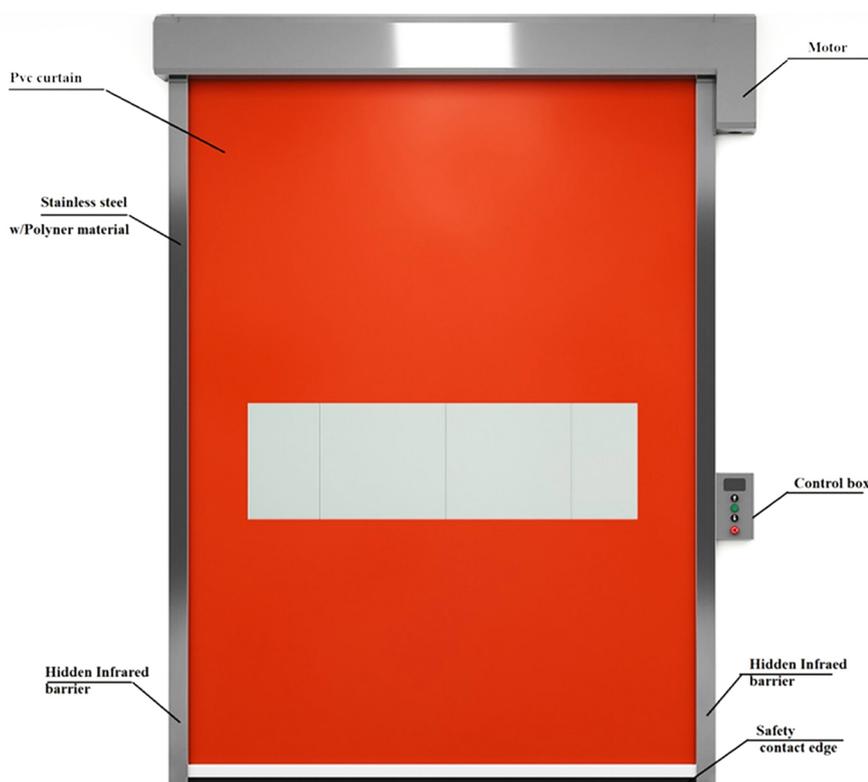

Fabric Colour options

